

Field Mount Temperature Transmitter

RTT5000



Output Signal: 4-20mA (Two-wire System)



Accuracy: $\pm 0.1\%$



Working Temperature: (-)40 ~ 85°C



Supply Voltage: 12V ~ 35V

ROCKSENSOR AT A GLANCE (ABOUT US)

Rocksensor is one of the global leaders specializing in Process Instrumentation, Research and Development and Designing of Industrial Automation Equipment. We provide highly precise pressure sensors and transmitters, flow metres, level transmitters and temperature transmitters with a prime focus to help our clients efficiently, safely and economically run complex industrial processes.

Rocksensor, headquartered in Switzerland, has its footprint in various geographical regions such as the US, Russia, South Korea, Italy, Germany, Singapore, Malaysia, Morocco, China, Taiwan, Australia, UAE, Brazil and India. Our clients come from some of the major industries such as Oil and Gas, Petrochemicals, Pharmaceuticals, FMCG, Automobiles, Water, Cement, Metal & Mining, and mainly from the Power Industry like Nuclear, Thermal, Hydro, and Solar.

Rocksensor deals in a wide range of highly accurate industrial automation instruments ensuring that even the complex industrial processes happen efficiently.

To fulfill the needs of our clients we make sure that our instruments work in even the harsh environmental conditions offering accurate recordings and communication.

We, at Rocksensor, believe in creating bonds that last a lifetime and create a success story for each and every client. Rocksensor aims to achieve a perfect fit in the global market landscape and establish our footprints across the globe.



CONTENTS

1. Technical Specifications 3

2. Wiring and Dimensions 4

KEY APPLICATION INDUSTRIES

- Oil and Gas sector
- Cement
- Metal
- Pulp and Paper
- Agriculture
- Textiles
- Chemicals
- Power
- Water
- Pharmaceutical
- Fertilizer
- Plastics and HVAC

1. Technical Specifications


1. Output signal: 4- 20mA (two-wire system)
2. Damping: 0-30 seconds
3. Input signal
4. Explosion proof- II 2G Ex db IIC T6 Gb

Standard	Sensor	Measuring Range	Minimum Measuring Range
IEC584-1	Thermocouple B	320 ~ 1820°C	500°C
	E	(-)200 ~ 900°C	50°C
	J	(-)200 ~ 1200°C	50°C
	K	(-)200 ~ 1372°C	50°C
	R	0 ~ 1768°C	500°C
	S	0 ~ 1768°C	500°C
	T	(-)200 ~ 400°C	50°C
	N	(-)200 ~ 1300°C	50°C
IEC751 2, 3 and 4 wire	Thermal resistance Pt100	(-)200 ~ 850°C	20°C
	Thermal resistance Pt1000	(-)200 ~ 250°C	20°C
Thermal Resistance	Ω	20 ~ 400 Ω	20 Ω
IEC751 2, 3 and 4 wire	CU50, CU100	(-)50 ~ 150°C	20°C
		(-)50 ~ 150°C	20°C
IEC751 $\alpha=0.00385$;			

5. Supply voltage: 12V ~ 35V
 6. Working environment temperature: (-)40 ~ 85°C
 7. Remote transmission and storage temperature: (-)40 ~ 100°C
 8. The error between zero and full scale is less than 0.1%
 9. Input and output isolation, isolation voltage 1.5kvac
 10. Accuracy $\pm 0.1\%$
 11. Temperature influence: Pt100 is less than $(0.05\% + \text{upper limit of range} / \text{range of range} \times 0.008\%) / 10K$ Thermocouple is less than $(0.05\% + \text{range upper limit (mV)} / \text{range range (mV)} \times 0.01\% + 0.014K / \text{range range (K)} \times 100\%) / 10K$
If Pt100 (0 ~ 400°C) is less than 0.063% / 10K. If K-type thermocouple (0 ~ 1000°C) is less than 0.074% / 10K
 12. Communication tools
 13. Software tool: EASYTT configuration software
 14. Mounting hole distance: 33mm, 36 mm
 15. Electromagnetic compatibility: IEC61326-1
 16. Display table
- Digital Display
- (1): 1/2 in sub-script
 - (2): Response time: 0.5s
 - (3): Measurement accuracy: 0.15%
 - (4): Working environment temperature: (-)20 ~ 70 °C


2. Wiring and Dimensions

a. Wiring Diagram

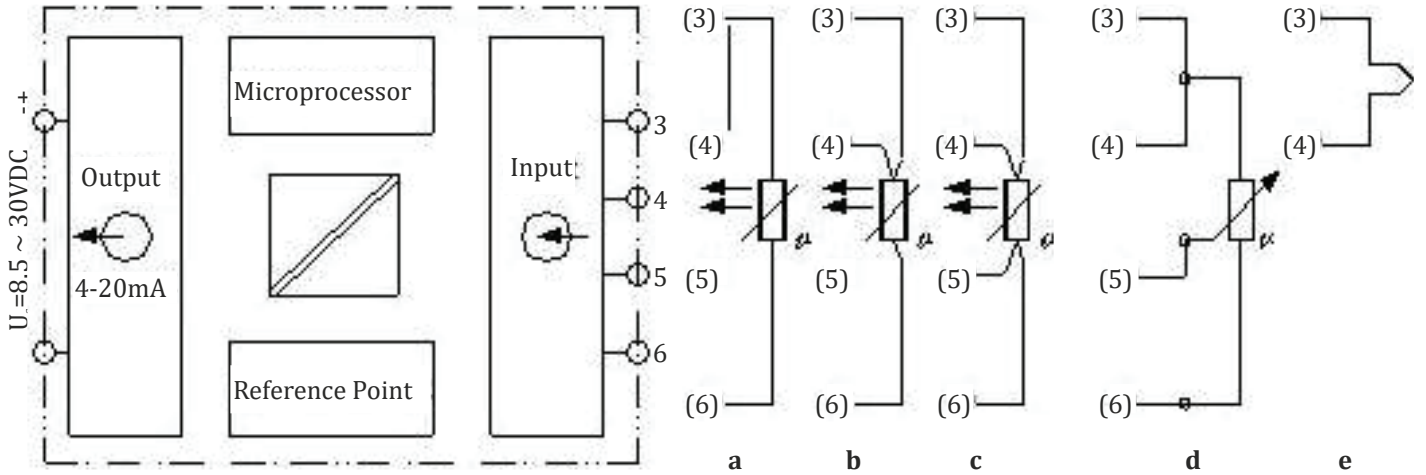

- a) Two-wire thermal resistance input
- b) Three-wire thermal resistance input
- c) Four-wire thermal resistance input
- d) Double thermal resistance input, two-wire system
- e) Potentiometer input (four-wire system)

b. Dimensions

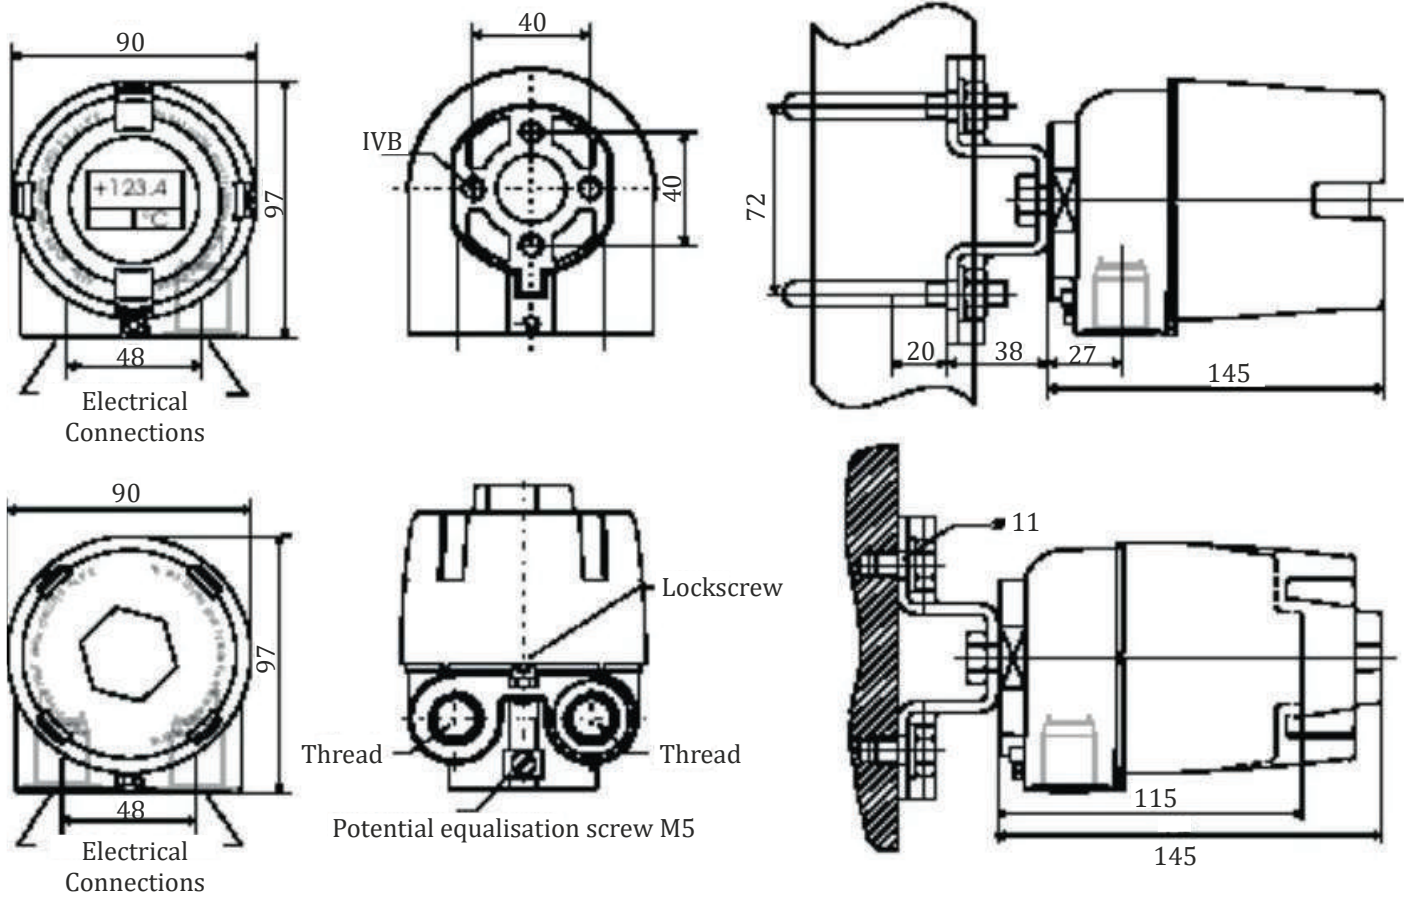

Field Instrumentation Range



Pressure Measurement

- Smart Differential Pressure Transmitter
- Smart Gauge Pressure Transmitter
- Smart Absolute Pressure Transmitter
- Miniature Pressure Transducer without display
- Sanitary Gauge/ Absolute Pressure Transmitter
- Submersible Pressure Transmitter
- Remote Seal Differential P.T. with capillary
- Remote Seal Differential P.T. Direct Mount
- Remote Seal Gauge/Absolute P.T. with capillary
- Remote Seal Gauge/Absolute P.T. Direct Mount



Flow Measurement

- Coriolis Mass Flowmeter
- Thermal Gas Mass Flowmeter
- Positive Displacement Flowmeter
- Electromagnetic Flowmeter
- Vortex Flowmeter
- Turbine Flowmeter
- Variable Area Flowmeter
- Clamp On Ultrasonic Flowmeter
- Inline Ultrasonic Flowmeter
- Portable Ultrasonic Flowmeter



Level Measurement

- RADAR Level Transmitter Horn Antenna
- Compact RADAR Level Transmitter
- RADAR Level Transmitter Sanitary
- RADAR Level Transmitter
- Guided Wave RADAR Level Transmitter
- Guided Wave RADAR Level Transmitter
- RADAR Level Transmitter Lens Antenna
- RADAR Level Transmitter Rod Antenna
- Ultrasonic Level Transmitter
- Microwave Barrier Level Switch
- Admittance Level Switch Series
- Vibrating Rod Level Switch Series
- Tuning Fork Level Switch Series



Temperature Measurement

- Head Mount Temperature Transmitter
- Temperature Transmitter for Sanitary Applications
- DIN Rail Temperature Transmitter
- Field Mount Temperature Transmitter

Rocksensor India Pvt. Ltd.

📍 B -36, Sector 67, Noida, Uttar Pradesh - 201301

For more details, contact us on:

☎ +91 928 948 8117 | +91 1204121469

✉ info@rocksensor.in

🌐 www.rocksensor.in

Global Offices

Global HQ & R&D Centre:
Rocksensor Sàrl, Switzerland

North America:
Rocksensor Automation LLC, USA

APAC:
Rocksensor Automation Co. Ltd., Shanghai

For more updates, follow us on:

in: Rocksensor India

▶: Rocksensor

f: Rocksensor

📷: Rocksensor

🐦: Rocksensor India