

Ultrasonic Level Transmitter

RUL11XX Series



Measuring Range: 0 ~ 0.3 - 20m



Measurement Accuracy: $\pm 0.25\%$



Output Signal: 4-20 mA/ HART/ RS485 Modbus



Protection: IP67

**Product
Datasheet**

ROCKSENSOR AT A GLANCE (ABOUT US)

Rocksensor is one of the global leaders specializing in Process Instrumentation, Research and Development and Designing of Industrial Automation Equipment. We provide highly precise pressure sensors and transmitters, flow metres, level transmitters and temperature transmitters with a prime focus to help our clients efficiently, safely and economically run complex industrial processes.

Rocksensor, headquartered in Switzerland, has its footprint in various geographical regions such as the US, Russia, South Korea, Italy, Germany, Singapore, Malaysia, Morocco, China, Taiwan, Australia, UAE, Brazil and India. Our clients come from some of the major industries such as Oil and Gas, Petrochemicals, Pharmaceuticals, FMCG, Automobiles, Water, Cement, Metal & Mining, and mainly from the Power Industry like Nuclear, Thermal, Hydro, and Solar.

Rocksensor deals in a wide range of highly accurate industrial automation instruments ensuring that even the complex industrial processes happen efficiently.

To fulfill the needs of our clients we make sure that our instruments work in even the harsh environmental conditions offering accurate recordings and communication.

We, at Rocksensor, believe in creating bonds that last a lifetime and create a success story for each and every client. Rocksensor aims to achieve a perfect fit in the global market landscape and establish our footprints across the globe.



CONTENTS

1. Overview	3
2. Working Principle	3
3. Applications	3
4. Advantages	3
5. Diagrams	4
6. Electrical Connection	4
7. Technical Parameters	5
8. Model Example	6

KEY APPLICATION INDUSTRIES

Oil and Gas sector
Cement
Metal
Pulp and Paper
Agriculture
Textiles

Chemicals
Power
Water
Pharmaceutical
Fertilizer
Plastics and HVAC


1. Overview

Ultrasonic level transmitter is a non-contact type, high reliability, cost-effective, easy to install and maintain level measurement instrument. It is used for measuring fluids like slurries, liquids and solids in industries like water/ water-treatment plants, municipal or sewage, Food & Beverages, Chemicals & Oil, Pharmaceutical, etc.

RULL11XX Series integrated Ultrasonic Level Sensor is available in 2-wire & 4-wire system.

2. Working Principle

Rocksensor Ultrasonic Level Transmitter works on the principle of “Time-of -Flight”. The sensor generates a pulse that sends ultrasound (mechanical) wave from the transducer face down to the fluid level. The media reflects the signal and the transit time delay between transmitting and receiving is converted into a 4/20mA output signal.

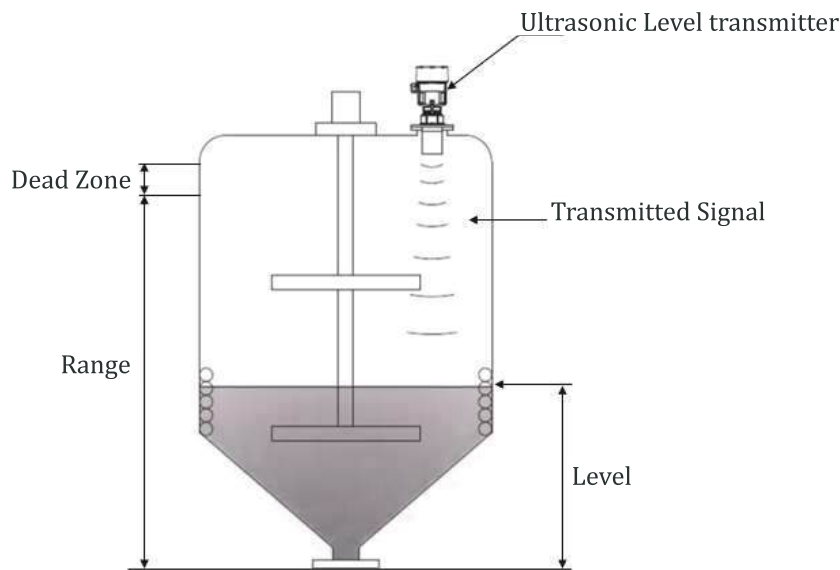


3. Application

1. Solids, Liquids
2. Buffer & storage tank levels
3. Open channel flow
4. Effluent pits
5. Reservoir level
6. Sanitary applications with CIP


4. Advantages

1. Non-contact type continuous level measurement with no moving parts & less maintenance.
2. Simple set-up, With integral 4 digit LCD display and buttons for on-site Configuration
3. Measures liquid height, distance to liquid, volume, or flow in open channels
4. Automatic power adjustment, gain control, temperature compensation.
5. Various output forms: programmable relay output, 4-20mA current output, digital HART®, RS-485 digital communication output.
6. Advanced detecting technology, rich software functions to adapt to a variety of complex environment.
7. Good directivity, strong penetrability, easy to obtain more concentrated sound energy for further transmission distance.
8. Easy to install and configure
9. Rugged metal or plastic housing, with Corrosion resistant PVDF wetted material & with IP67 enclosure

5. Diagrams

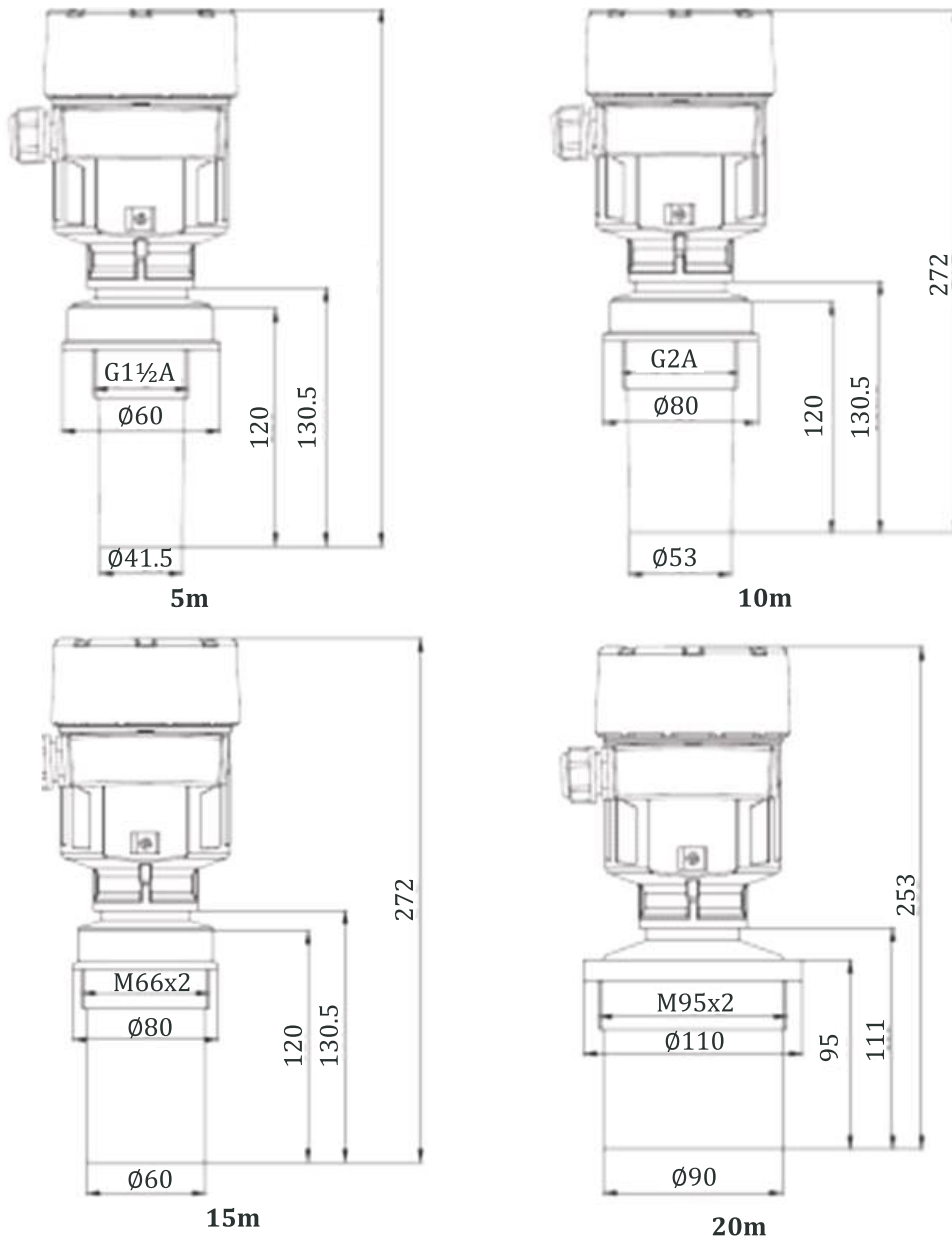

6. Electrical Connection

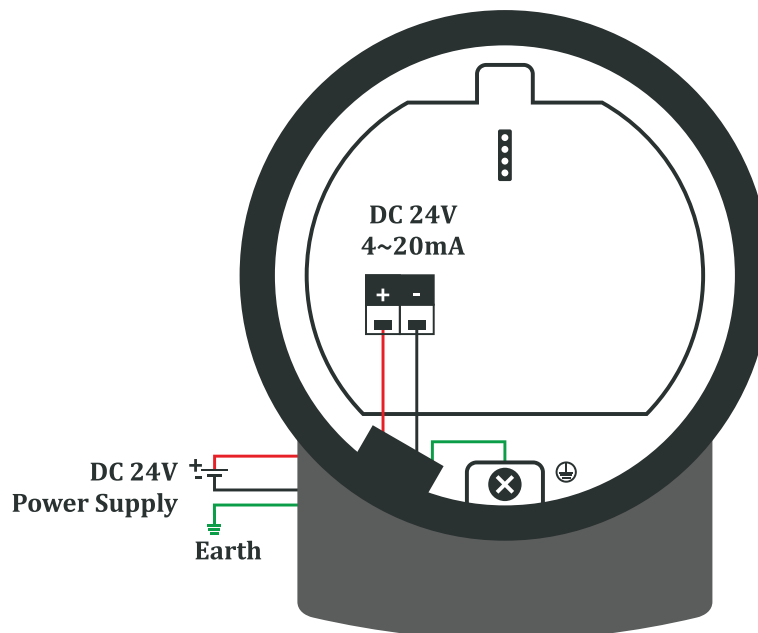

7. Technical Parameters

Model	RUL1105	RUL1110	RUL1115	RUL1120
Standard Transmitter Range	Liquid (0.3 ~ 5m)	Liquid (0.4 ~ 10m)	Liquid(0.5 ~ 15m)	Liquid (0.6 ~ 20m)
Beam Angle	5°			3°
Frequency	50KHZ	40KHZ	28KHZ	
Measurement Accuracy	±0.25%			
Process Connection	G1-1/2A or 1-1/2NPT thread	G2A or 2NPT thread	M66*2	M95*2
Antenna Type	C type anti-corrosion sealed type (material: PVDF)		Type B sealed	Type A open probe
Transducer Seal	Fluoride			
Weight	0.7KG	0.8KG	0.9KG	1.2KG
	(Final weight may depend on process connection & accessories)			
Process Temperature	(-)40 ~ 70°C			
Ambient Temperature	(-)20 ~ 70°C			
Process Pressure	(-)0.02 ~ 0.1MPa / (-)0.02 ~ 0.2MPa with flange connection)			
Output	4 ~ 20mADC			
Communication	HART/ RS485			
Ingress Protection	Plastic Housing IP66/ Aluminium housing IP67			
Relative Humidity	<95%			
Resolution	1mm			
Repeatability	±3mm			
Damping Time	0 ~ 30s adjustable			
Fault Output	20.5mA; 22mA; 3.9mA			
Resistance To Vibration	10m/s ² Mechanical vibration			
Housing Material	Plastic(PBT)/ Die cast aluminium			
Housing Seal	Fluoride			
Upper Cover Windows	Polycarbonate (PC)			
Ground Terminal	Stainless Steel (SS)			
Cable Inlet/ Plug	One M20×1.5 cable entry (cable diameter 5 ~ 9mm)/ 1 blind plug M20×1.5/ 1/2" NPT			
Spring Terminal Block	2.5 mm ² for traverse cross section			
Power Supply	2-wire	Standard Type	24VDC	
		Intrinsic Safety	21.5 ~ 26.5VDC	
		Power Consumption	Max. 22.5mA	
		Allowable Ripple	<100Hz - (100 ~ 100k)Hz	
	4-wire	Standard Type	24(1±10%)VDC/ 220(1±10%)VAC	
		Power Consumption	Max. 1VA, 1W	

8. Model Example

Example: RUL1105

Explosion-proof grade: non-explosion-proof (standard type)

Range: 0-5 meters;

blind zone: 0.3 meters;

Frequency 50KHZ

Antenna: C type anti-corrosion sealed type (material: PVDF)

Process connection: G2" A threaded connection

Process temperature: (-40-70)°C;

Process pressure: (-0.02-0.1) MPA

Accuracy $\pm 0.25\%$;

Signal output: (4-20) MA /24VDC

Electrical interface: $\frac{1}{2}$ NPT

Protection level: aluminum housing IP67

Four-digit display programming

Field Instrumentation Range



Pressure Measurement

- Smart Differential Pressure Transmitter
- Smart Gauge Pressure Transmitter
- Smart Absolute Pressure Transmitter
- Miniature Pressure Transducer without display
- Sanitary Gauge/ Absolute Pressure Transmitter

- Submersible Pressure Transmitter
- Remote Seal Differential P.T. with capillary
- Remote Seal Differential P.T. Direct Mount
- Remote Seal Gauge/Absolute P.T. with capillary
- Remote Seal Gauge/Absolute P.T. Direct Mount



Flow Measurement

- Coriolis Mass Flowmeter
- Thermal Gas Mass Flowmeter
- Positive Displacement Flowmeter
- Electromagnetic Flowmeter
- Vortex Flowmeter

- Turbine Flowmeter
- Variable Area Flowmeter
- Clamp On Ultrasonic Flowmeter
- Inline Ultrasonic Flowmeter
- Portable Ultrasonic Flowmeter



Level Measurement

- RADAR Level Transmitter Horn Antenna
- Compact RADAR Level Transmitter
- RADAR Level Transmitter Sanitary
- RADAR Level Transmitter
- Guided Wave RADAR Level Transmitter
- Guided Wave RADAR Level Transmitter
- RADAR Level Transmitter Lens Antenna

- RADAR Level Transmitter Rod Antenna
- Ultrasonic Level Transmitter
- Microwave Barrier Level Switch
- Admittance Level Switch Series
- Vibrating Rod Level Switch Series
- Tuning Fork Level Switch Series



Temperature Measurement

- Head Mount Temperature Transmitter
- Temperature Transmitter for Sanitary Applications

- DIN Rail Temperature Transmitter
- Field Mount Temperature Transmitter

Rocksensor India Pvt. Ltd.

📍 B -36, Sector 67, Noida, Uttar Pradesh - 201301

For more details, contact us on:

☎ +91 928 948 8117 | +91 1204121469

✉ info@rocksensor.in

🌐 www.rocksensor.in

Global Offices

Global HQ & R&D Centre:
Rocksensor Sàrl, Switzerland

North America:
Rocksensor Automation LLC, USA

APAC:
Rocksensor Automation Co. Ltd., Shanghai

For more updates, follow us on:

in: Rocksensor India

yt: Rocksensor

f: Rocksensor

ig: Rocksensor

tw: Rocksensor India