

# Ultrasonic Flow Meter

## RUF100



Accuracy:  $\pm 1\%$



Size upto DN6000mm



Strong Anti-Interference



IP68 Protection Class

**Product  
Datasheet**

# ROCKSENSOR AT A GLANCE (ABOUT US)

Rocksensor is one of the global leaders specializing in Process Instrumentation, Research and Development and Designing of Industrial Automation Equipment. We provide highly precise pressure sensors and transmitters, flow metres, level transmitters and temperature transmitters with a prime focus to help our clients efficiently, safely and economically run complex industrial processes.

Rocksensor, headquartered in Switzerland, has its footprint in various geographical regions such as the US, Russia, South Korea, Italy, Germany, Singapore, Malaysia, Morocco, China, Taiwan, Australia, UAE, Brazil and India. Our clients come from some of the major industries such as Oil and Gas, Petrochemicals, Pharmaceuticals, FMCG, Automobiles, Water, Cement, Metal & Mining, and mainly from the Power Industry like Nuclear, Thermal, Hydro, and Solar.

Rocksensor deals in a wide range of highly accurate industrial automation instruments ensuring that even the complex industrial processes happen efficiently.

To fulfill the needs of our clients we make sure that our instruments work in even the harsh environmental conditions offering accurate recordings and communication.

We, at Rocksensor, believe in creating bonds that last a lifetime and create a success story for each and every client. Rocksensor aims to achieve a perfect fit in the global market landscape and establish our footprints across the globe.



# CONTENTS


1. Introduction .....	4
2. Salient Features .....	4
3. Advantages .....	4
4. Technical Parameters .....	5
4.1 Transmitter Options .....	5
4.2 SD Memory Card .....	5
4.3 Measurement Options .....	6
4.4 Transducer .....	6
4.5 Temperature Sensor .....	7
5. Model Selection Table .....	7

## KEY APPLICATION INDUSTRIES

- Oil and Gas sector
- Cement
- Metal
- Pulp and Paper
- Agriculture
- Textiles
- Chemicals
- Power
- Water
- Pharmaceutical
- Fertilizer
- Plastics and HVAC

## 1. Introduction

Ultrasonic flowmeters, as the name suggests, are meters that use sound waves to measure flow. These meters are attached around the inside or outside of a pipe, & when activated, transmit ultrasonic waves from one side of the meter to the other. These transmitted waves are then collected & measured to determine the flow. There are multiple types of flowmeters, though they operate on the same principle. Some can be inserted into the pipe or attached inline. Some options can even be attached to the outside of the pipe using clamps.

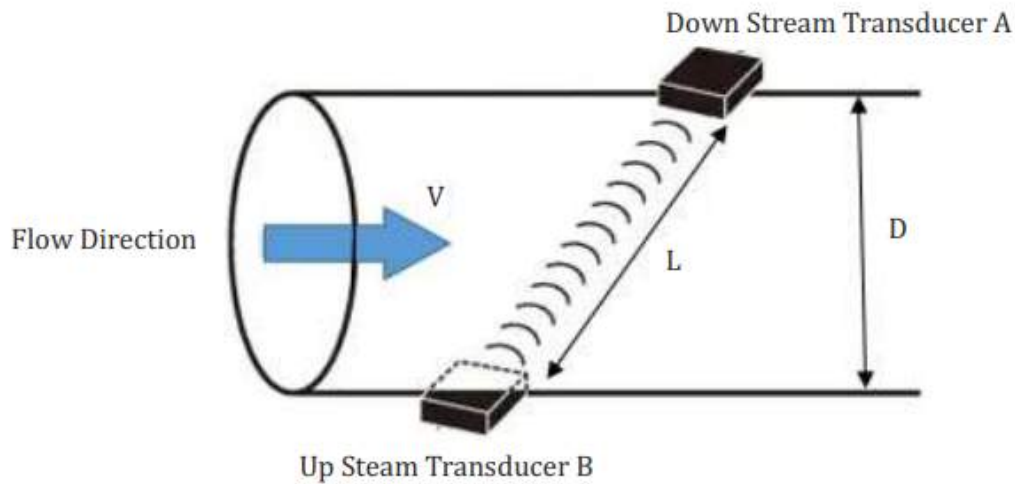

V- Flow velocity of the medium , L- length of acoustic path

## 2. Salient Features

- High accuracy up to 1%
- Wide pipe flow measurement: DN15 ~ DN6000
- High reliability adopting low voltage, multi-pulse radiating circuit
- Anti-interference design with double balanced signal differential transmission
- Powerful memory function up to 10 years with expandable storage card
- Can be used as an Energy Meter by connecting Temperature Sensor
- Available in Clamp-On, Insertion & In-line Sensor Type
- Wall-mount, panel mount & explosion-proof transmitter options




## 3. Advantages

- No moving parts
- Low maintenance
- Digital and analog options
- High Accuracy


### 4. Technical Specifications

Parameters		Specifications	
Transmitter	Principle	Ultrasonic transit-time principle, Four byte IEEE754 Floating-point arithmetic	
	Accuracy	±1%	
	Display	LCD	
	Output		One 4-20 mADC Output, Impedance 0-1K, 0.1% accuracy
			One OCT Pulse Output (Width 6-1000ms, Default 200 ms)
			One Relay Output
Input		Three 4-20mADC, Input accuracy 0.1% (Can collect temperature, pressure, level signals, etc.)	
		Can connect with three-wire Pt100 RTD to measure Heat Flow	
	Data Interface	Isolated RS485 interface, can upgrade Flowmeter through PC, supports Modbus	
Signal Transmission		Up to 1000 meters over RS485 Communication/ 4-20 mADC	
	Installation	Straight Pipe connection before and after Flowmeter (≥20DN, ≥5DN), respectively	
Applicable Pipe Material	Material	SS, MS, CS, Copper, Aluminium, PVC, FRP, etc. (Liner allowed)	
	Diameter	DN15 ~ DN6000 mm	
	Installation	Upstream 10D, downstream 5D, 30D away from the pump outlet (D: Diameter)	
Medium	Fluid	Water, Sea Water, Acid Liquid, Beer, Alcohol, Oil & any other liquid that can spread sonic	
	Temperature	(-)30 ~ 160°C	
	Turbidity	10,000 ppm (with limited bubbles)	
	Velocity	0 ~ ±32 m/s	
Operating Environment	Temperature	Transmitter: -20 ~ 60° C; Transducer: -30 ~ 160° C	
	Humidity	Transmitter: 85%RH	
Transmitter Protection Grade		IP68 (Water depth <2m)	
Power Supply		8 ~ 36 VDC or 85 ~ 265 VAC	
Power Consumption		1.5W	







#### 4.1 Transmitter Options

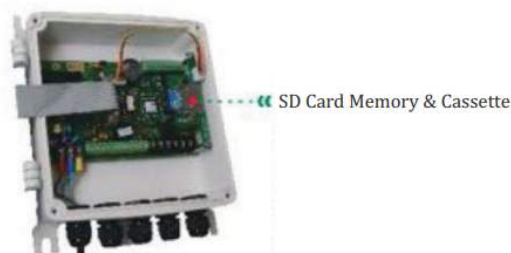		
<b>Wall Mounted Type</b>	<b>Panel Mounted Type</b>	<b>Explosion-Proof Type</b>
Used to mount on the wall	Used for meter cabin sets installation	Used in hazardous area
Dimension: 170*180*56 mm	Dimension: 152*76 mm	Dimension: 298*298*110 mm

#### 4.2 SD Memory Card



4.3 Measurement Options

	Flow Measurement	Heat/ Cold Energy Measurement	Feature
Clamp-On Type		 Water Supply Pipe Water Return Pipe	<ul style="list-style-type: none"> <li>* Installation require drying off the pipe</li> <li>* High accuracy, stable &amp; reliable during long-term operation</li> <li>* Mating clamp temperature sensor that can measure the temp. of the outside of tube to achieve heat measurement</li> </ul>
Insertion Type		 Water Supply Pipe Water Return Pipe	<ul style="list-style-type: none"> <li>* Installation without drying up, no pressure loss</li> <li>* Easy installation &amp; maintenance</li> <li>* Mating clamp temperature sensor that can measure the temp. of the outside of tube to achieve heat measurement</li> </ul>
Pipe Type		 Water Supply Pipe Water Return Pipe	<ul style="list-style-type: none"> <li>* Installation require drying off the pipe</li> <li>* High accuracy, stable &amp; reliable during long-term operation</li> <li>* Mating clamp temperature sensor that can measure the temperature of the outside of tube to achieve heat measurement</li> </ul>


4.4 Transducer

Type	Picture	Specification	Model	Pipe Size	Temperature	Dimension
Standard Clamp-On Type		Small	S2	DN15 ~ DN100	(-)30 ~ 90°C	45x25x32mm
		Medium	M2	DN50 ~ DN700	(-)30 ~ 90°C	64x39x44mm
		Large	L2	DN300 ~ DN6000	(-)30 ~ 90°C	97x54x53mm
High Temperature Clamp-On Type		Small	TS-2-HT	DN15 ~ DN100	(-)30 ~ 160°C	45x25x32mm
		Medium	TM-1-HT	DN50 ~ DN700	(-)30 ~ 160°C	64x39x44mm
		Large	TL-1-HT	DN300 ~ DN6000	(-)30 ~ 160°C	97x54x53mm
Insertion Type		Standard	TC-1	DN80 ~ DN6000	(-)30 ~ 160°C	190x80x55 mm
		Longer Type	TC-2	DN80 ~ DN6000	(-)30 ~ 160°C	335x80x55 mm
Pipeline Type		π	G3	DN15 ~ DN25	(-)30 ~ 160°C	SS304 Thread
		Standard	G2	DN32/ DN40	(-)30 ~ 160°C	CS Thread Conn.
		Standard	G1	DN52 ~ DN6000	(-)30 ~ 160°C	CS Flange Conn.

4.3 Measurement Options

Specification	Model	Measurement Range	Temp. Range	Installation Requirement	Accuracy
Three Wire PT100 Clamp-On Temperature Sensor	CT-1	>DN50	(-)40 ~ 160°C	No need to cut flow line	100°C±0.8°C Temperature difference ≤0.1°C after matching accurately
Three Wire PT100 Insertion Temperature Sensor	TCT-1	>DN50	(-)40 ~ 160°C	No need to cut flow line	
Three Wire PT100 Pressure Installation Insertion Temperature Sensor	PCT-1	>DN50	(-)40 ~ 160°C	No need to cut flow line	
Small size three wire Pt100 Insertion Type Temperature Sensor	SCT-1	>DN50	(-)40 ~ 160°C	No need to cut flow line	

5. Model Selection Table

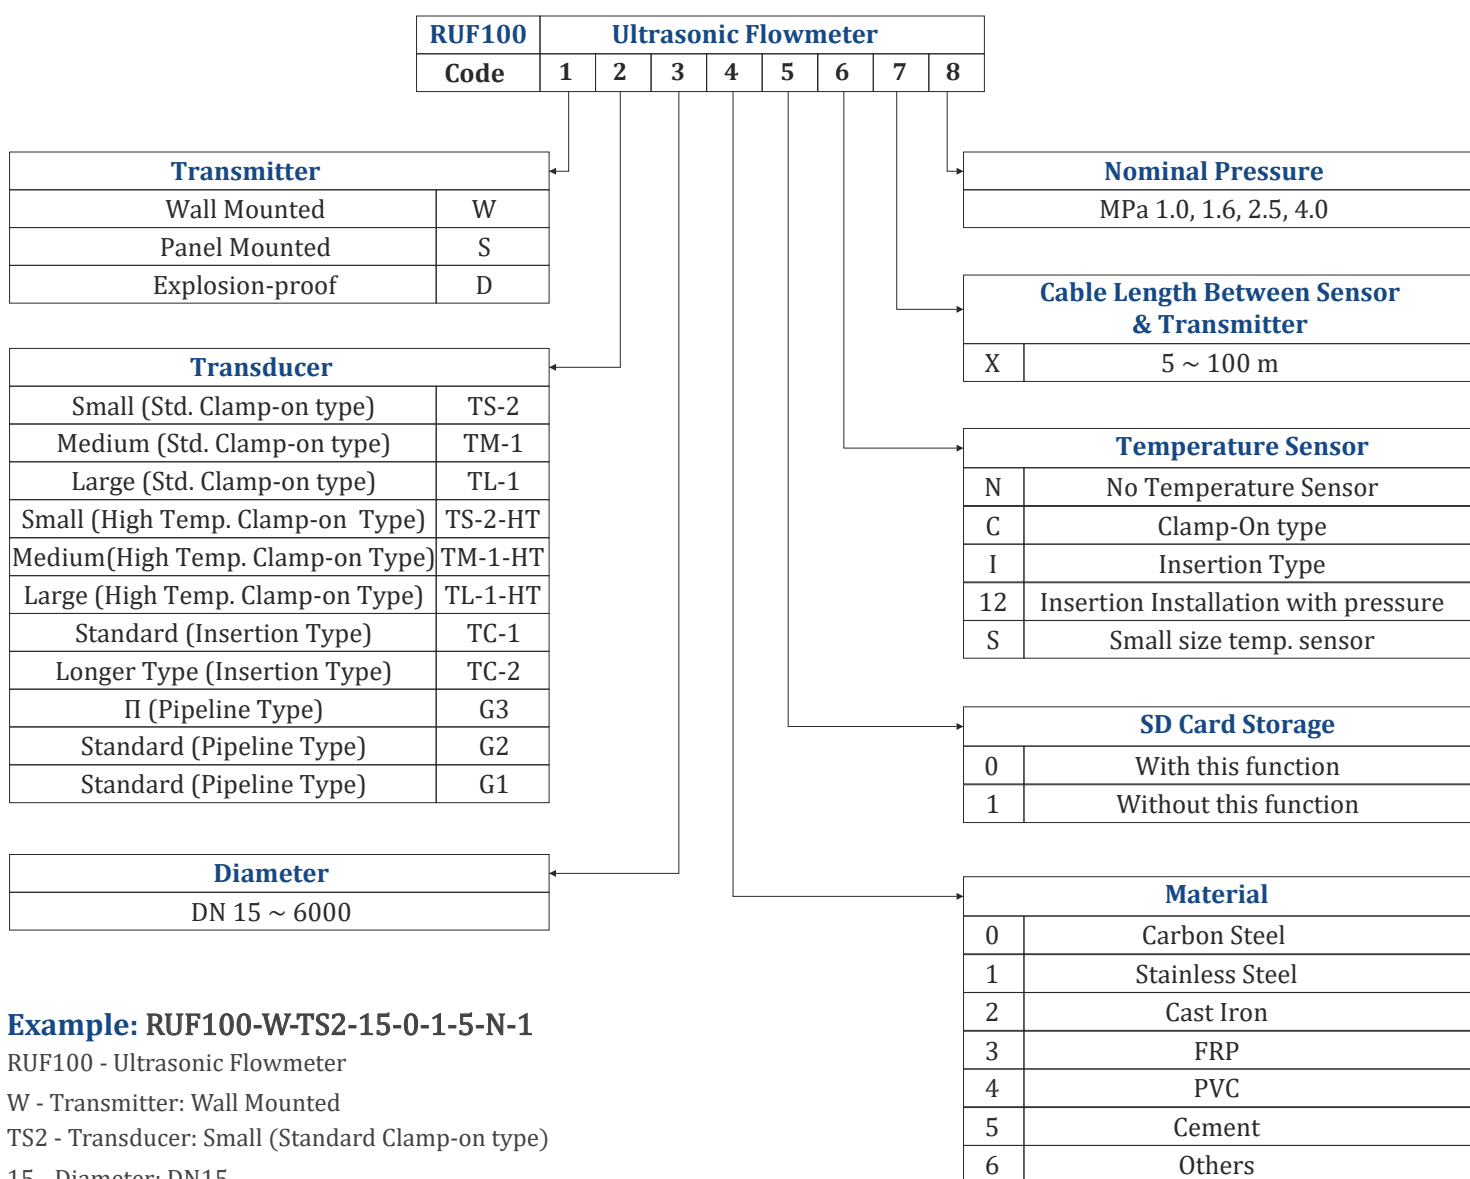

## Field Instrumentation Range



### Pressure Measurement

- Smart Differential Pressure Transmitter
- Smart Gauge Pressure Transmitter
- Smart Absolute Pressure Transmitter
- Miniature Pressure Transducer without display
- Sanitary Gauge/ Absolute Pressure Transmitter

- Submersible Pressure Transmitter
- Remote Seal Differential P.T. with capillary
- Remote Seal Differential P.T. Direct Mount
- Remote Seal Gauge/Absolute P.T. with capillary
- Remote Seal Gauge/Absolute P.T. Direct Mount



### Flow Measurement

- Coriolis Mass Flowmeter
- Thermal Gas Mass Flowmeter
- Positive Displacement Flowmeter
- Electromagnetic Flowmeter
- Vortex Flowmeter

- Turbine Flowmeter
- Variable Area Flowmeter
- Clamp On Ultrasonic Flowmeter
- Inline Ultrasonic Flowmeter
- Portable Ultrasonic Flowmeter



### Level Measurement

- RADAR Level Transmitter Horn Antenna
- Compact RADAR Level Transmitter
- RADAR Level Transmitter Sanitary
- RADAR Level Transmitter
- Guided Wave RADAR Level Transmitter
- RADAR Level Transmitter Lens Antenna

- RADAR Level Transmitter Rod Antenna
- Ultrasonic Level Transmitter
- Microwave Barrier Level Switch
- Admittance Level Switch Series
- Vibrating Rod Level Switch Series
- Tuning Fork Level Switch Series



### Temperature Measurement

- Head Mount Temperature Transmitter
- Temperature Transmitter for Sanitary Applications

- DIN Rail Temperature Transmitter
- Field Mount Temperature Transmitter

## Rocksensor India Pvt. Ltd.

📍 B -36, Sector 67, Noida, Uttar Pradesh - 201301

**For more details, contact us on:**

☎ +91 928 948 8117 | +91 1204121469

✉ info@rocksensor.in

🌐 www.rocksensor.in

## Global Offices

**Global HQ & R&D Centre:**  
Rocksensor Sàrl, Switzerland

**North America:**  
Rocksensor Automation LLC, USA

**APAC:**  
Rocksensor Automation Co. Ltd., Shanghai

**For more updates, follow us on:**

**in:** Rocksensor India

**yt:** Rocksensor

**f:** Rocksensor

**ig:** Rocksensor

**tw:** Rocksensor India