

Digital Miniature Pressure Transmitter

RP202C



Accuracy : $\pm 0.5\%FS$; $0.25\%FS$



Process Temperature upto $300^{\circ}C$



Range Limit : $-0.1Mpa \sim 100Mpa$



IP65 Protection

ROCKSENSOR AT A GLANCE (ABOUT US)

Rocksensor is one of the global leaders specializing in process Instrumentation, Research and Development and Designing of Industrial Automation Equipment. We provide highly precise pressure sensors and transmitters, flow metres, level transmitters & temperature transmitters with a prime focus to help our clients efficiently, safely and economically run complex industrial processes.

Rocksensor headquartered in Germany (originated in Switzerland), has its footprint in various geographical regions such as the US, Russia, South Korea, Italy, Germany, Singapore, Malaysia, China, Taiwan, Australia, UAE, Brazil, and India. Our clients come from some of the major industries such as Oil and Gas, Petrochemicals, Pharmaceuticals, FMCG, Automobiles, Water, Cement, Metal & Mining and mainly from the Power Industry like Nuclear, Thermal, Hydro and Solar.

Rocksensor deals in a wide range of highly accurate industrial automation instruments ensuring that even the complex industrial processes happen efficiently.

To fulfill the needs of our clients we make sure that our instruments work in even the harsh environmental conditions offering accurate recordings and communication.

We, at Rocksensor, believe in creating bonds that last a lifetime and create a success story for each and every client. Rocksensor aims to achieve a perfect fit in global market landscape and establish our footprints across the globe.



CONTENTS

1. Introduction 4

 Used For

2. Key Features 4

3. Technical Specifications 5

4. Size (mm) 5

5. High Temperature Process Connector (Accessories) 6

6. Measuring Range 6

7. Electrical Diagram 6

8. Model selection Table 7

KEY APPLICATION INDUSTRIES

- Oil and Gas sector
- Cement
- Metal
- Pulp and Paper
- Agriculture
- Textiles
- Chemicals
- Power
- Water
- Pharmaceutical
- Fertilizer
- Plastics and HVAC

1. Introduction

RP202C pressure transmitter is universal industrial application for gauge, absolute measured with ideal solution for different range measurement, adopts advanced diffusion silicon sensor as sensitive components, digital and stable circuit, precise temperature compensation, excellent sealing and assembly to guarantee the high quality and stability, widely used in various pressure measured industry.

Used For:

- Hydraulics
- Pumps
- Constant Pressure Water Supply
- Compressor
- Refrigerator
- Air Conditioner Etc. Machine
- Petroleum
- Metallurgy
- Chemical Industry Process Control

2. Key Features

- High accuracy and stability: $\pm 0.5\%$, 0.25%
- Gauge, Absolute pressure measured
- Range: -100Kpa to 60Mpa, ex-work range programmable
- With anti- lightning, anti-RF interference
- Digital electrical board, water-proof, dust-proof, anti-interference With reversed polarity protection and instantaneous over current and over cross-voltage protection
- SS316L stainless steel diaphragm, stainless steel material suitable for various complicated environment




Digital Miniature Pressure Transducer

3. Technical Specifications

Characterstics	Parameters
Measured pressure	Gauge, Absolute
Process fluid	Liquid, Gas, Vapor, Oil
Range	-0.1Mpa ~ 10Mpa
Accuracy	±0.5%FS; 0.25%FS
Stability	0.1%F. S/year
Working temperature	-20°C ~ 80°C
Compensation temperature	20°C; -10°C ~ 70°C
Zero temperature Shift	±1.5%FS/°C(acc:0.5%FS), ±0.75%FS/°C(acc:0.25%FS)
Full range temperature Shift	±1.5%FS/°C(acc:0.5%FS), ±0.75%FS/°C(acc:0.25%FS)
Overload pressure	150%FS
Insulation resistance	≥100MΩ(50VDC)
Load resistance	4-20mA: ≥800Ω
(Output)	0-10VDC: ≥10KΩ
Process Connector	G1/2", G1/4' ,1/2"NPT,1/4"NPT
Diaphragm material	SS316L
Connection material	SS304 stainless steel
Body material	SS304 stainless steel
Output	4-20mA
Electrical connector	Hirschman plug
Display	LCD:- 1999 ~ 19999; LED; 9999
Vibration	10g, 20 ~ 2KHz
Shock	100g/10ms
IP protection	IP65
Storage temperature	-10°C ~ 60°C
Storage Humidity	10% ~ 90%
Power supply	12 ~ 30VDC
Standard power supply	24VDC ±5%, ripple < 1%

4. Size (mm)

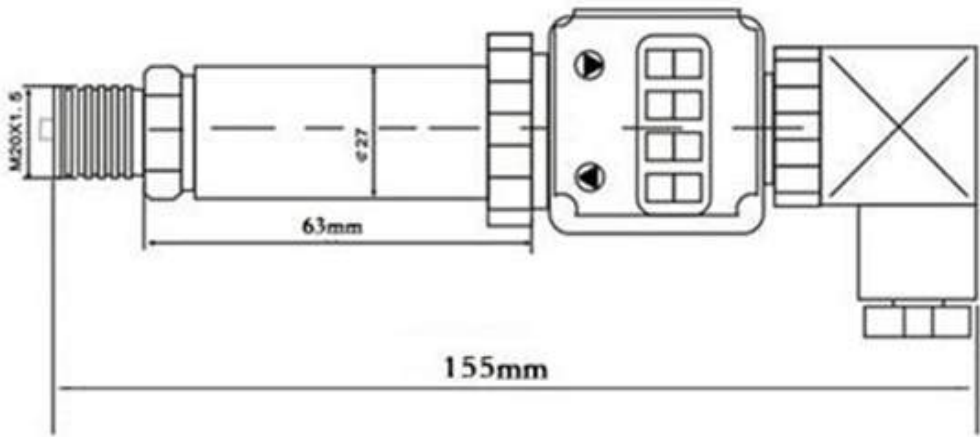


5. High Temperature Process Connector (Accessories)

Pigtail Siphon : T2:150°C, 10Mpa	T2: Fluid: 0 ~ 150°C, 100Mpa	T3: Fluid: 0 to 300°C, 100Mpa
		

6. Measuring Range

Code	Range	Code	Range
01	0-10Kpa/ 0-0.1bar/0-100mbar	11	0-1.6Mpa / 0-16bar
02	0-20Kpa / 0-0.2bar/0-200mbar	12	0-2.5Mpa / 0-25bar
03	0-35Kpa/ 0-0.35bar/0-350mbar	13	0-4Mpa / 0-40bar
04	0-70Kpa/ 0-0.7bar/0-700mbar	14	0-6Mpa / 0-60bar
05	0-100Kpa/0-0.1Mpa/ 0-1bar	15	0-10Mpa / 0-100bar
06	0-160Kpa/0-0.16Mpa / 0-1.6bar	16	0-16Mpa /0-160bar
07	0-250Kpa/0-0.25Mpa/0-2.5bar	17	0-25Mpa /0-250bar
08	0-400kpa/0-0.4Mpa/0-4.0bar	18	0-40Mpa /0-400bar
09	0-600kpa/0-0.6Mpa/0-6.0bar	19	0-60Mpa /0-600bar
10	0-1Mpa/0-10bar	20	0-100Mpa /0-1000bar

7. Electrical Diagram

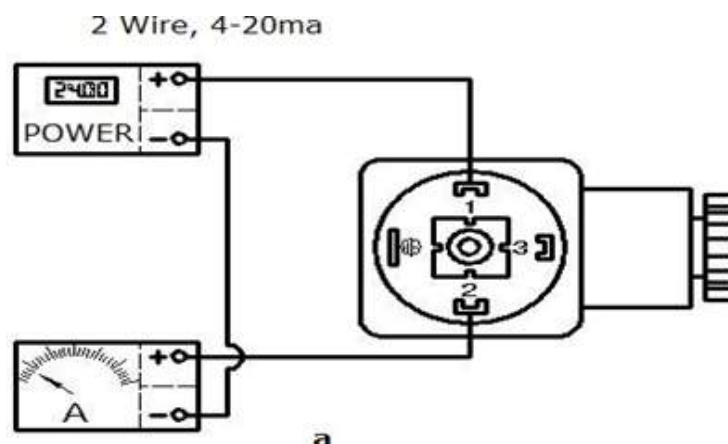

8. Model Selection Table

RP202C		Digital Miniature Pressure Transmitter							
Code		1	2	3	4	5	6	7	8

Type	
Gauge pressure measured	G
Absolute pressure measured	A

Display Type	
LED Display	E
LCD Display	D

Process Temperature	
-20℃ ~ 80℃	T1
0 ~ 150℃ (with high temperature accessory)	T2
0 ~ 300℃ (with high temperature accessory)	T3

Measured Range	
Negative pressure range	00
0-10Kpa/ 0-0.1bar/0-100mbar	01
0-20Kpa / 0-0.2bar/0-200mbar	02
0-35Kpa/ 0-0.35bar/0-350mbar	03
0-70Kpa/ 0-0.7bar/0-700mbar	04
0-100Kpa/0-0.1Mpa/ 0-1bar	05
0-160Kpa/0-0.16Mpa / 0-1.6bar	06
0-250Kpa/0-0.25Mpa/0-2.5bar	07
0-400kpa/0-0.4Mpa/0-4.0bar	08
0-600kpa/0-0.6Mpa/0-6.0bar	09
0-1Mpa/0-10bar	10
0-1.6Mpa / 0-16bar	11
0-2.5Mpa / 0-25bar	12
0-4Mpa / 0-40bar	13
0-6Mpa / 0-60bar	14
0-10Mpa / 0-100bar	15
0-16Mpa /0-160bar	16
0-25Mpa /0-250bar	17
0-40Mpa /0-400bar	18
0-60Mpa /0-600bar	19
0-100Mpa /0-1000bar	20
Above 100Mpa high pressure, special	HX

Special Function	
N	None
A2	0.25% High Accuracy for range higher than 100Kpa

Electrical Connector	
S	Hirschman plug
D	Direct cable type

Process Connection	
P1	G1/2", thread
P2	1/2"NPT, thread
P3	G1/4", thread
P4	1/4"NPT, thread
P5	M20X 15, thread
P6	M14x1.5, thread
X	Customized

Output	
A	4-20 mA, 2 wire

Example: RP202C-GET101AP1SN

RP202C - Digital Miniature Pressure Transmitter

G - Type : Gauge pressure measured

E - Display Type : LED Display

T1 - Process Temperature : -20℃ ~ 80℃

01 - Measured Range : 0-10Kpa/ 0-0.1bar/0-100mbar

A - Output : 4-20ma, 2 wire

P1 - Process Connection : G1/2", thread

S - Electrical Connector : Hirschman plug

N - Special Function : None

Note:
*Please advise the cable length you required if the electrical connection is direct cable type
*Absolute pressure range only for code 03, 05 to 12

Field Instrumentation Range



Pressure Measurement

- Smart Differential Pressure Transmitter
- Smart Gauge Pressure Transmitter
- Smart Absolute Pressure Transmitter
- Miniature Pressure Transducer without display
- Sanitary Gauge/ Absolute Pressure Transmitter

- Submersible Pressure Transmitter
- Remote Seal Differential P.T. with capillary
- Remote Seal Differential P.T. Direct Mount
- Remote Seal Gauge/Absolute P.T. with capillary
- Remote Seal Gauge/Absolute P.T. Direct Mount



Flow Measurement

- Coriolis Mass Flowmeter
- Thermal Gas Mass Flowmeter
- Positive Displacement Flowmeter
- Electromagnetic Flowmeter
- Vortex Flowmeter

- Turbine Flowmeter
- Variable Area Flowmeter
- Clamp On Ultrasonic Flowmeter
- Inline Ultrasonic Flowmeter
- Portable Ultrasonic Flowmeter



Level Measurement

- RADAR Level Transmitter Horn Antenna
- Compact RADAR Level Transmitter
- RADAR Level Transmitter Sanitary
- RADAR Level Transmitter
- Guided Wave RADAR Level Transmitter
- Guided Wave RADAR Level Transmitter
- RADAR Level Transmitter Lens Antenna

- RADAR Level Transmitter Rod Antenna
- Ultrasonic Level Transmitter
- Microwave Barrier Level Switch
- Admittance Level Switch Series
- Vibrating Rod Level Switch Series
- Tuning Fork Level Switch Series



Temperature Measurement

- Head Mount Temperature Transmitter
- Temperature Transmitter for Sanitary Applications

- DIN Rail Temperature Transmitter
- Field Mount Temperature Transmitter

Rocksensor India Pvt. Ltd.

📍 B -36, Sector 67, Noida, Uttar Pradesh - 201301

For more details, contact us on:



+91 928 948 8117 | +91 1204121469



✉ : info@rocksensor.in



🌐 : www.rocksensor.in

Global Offices

Head Office

Rocksensor GmbH, Germany

North America:

Rocksensor Automation LLC, USA

APAC:

Rocksensor Automation Co.Ltd., Shanghai

For more updates, follow us on:

in: Rocksensor India

▶: Rocksensor

f: Rocksensor

@: Rocksensor

🐦: Rocksensor India